

EXPANDED METAL GRATING

ALSO AVAILABLE IN ALUMINUM, STAINLESS AND GALVANIZED


Style	Weight Pounds per in Hundred C.S.F.	Center to Center of Bond (inches)		Size of Openings (inches)		Size of Strands (inches)		Overall Thickness (inches)
		A	B	C	D	Width	Thickness	
		Width	Length	Width	Length			
3 lb.	300	1.335	5.33	0.938	3.438	0.261	0.183	0.500
3.14 lb.	314	2.000	6.00	1.625	4.875	0.308	0.250	0.562
4 lb.	400	1.335	5.33	0.938	3.438	0.297	0.215	0.625
4.27 lb.	427	1.412	4.00	1.000	2.875	0.297	0.250	0.625
5 lb.	500	1.333	5.33	0.813	3.375	0.327	0.250	0.625
6.25 lb.	625	1.412	5.33	0.813	3.375	0.347	0.312	0.750
7 lb.	700	1.412	5.33	0.813	3.375	0.388	0.312	0.750

Standard Sheet Size is 4' X 8'.

BAR GRATING



Smooth-surface grating



Serrated-surface safety grating

GRATING AVAILABLE IN CARBON STEEL, ALUMINUM, STAINLESS AND FIBERGLASS

Standard Sheet Sizes

2' & 3' wide


20' & 24' long

UNPAINTED OR GALVANIZED

Standard Mesh Types

Type 19W4

(OTHER PATTERNS ARE AVAILABLE)



Lbs. Per Sq. Ft.			
Bearing Bars		Type 19W4	
3/4	x	1/8	4.0
	x	3/16	5.6
1	x	1/8	5.1
	x	3/16	7.3
1-1/4	x	1/8	6.1
	x	3/16	8.9

Lbs. Per Sq. Ft.			
Bearing Bars		Type 19W4	
1-1/2	x	1/8	7.3
	x	3/16	10.6
1-3/4	x	3/16	12.2
2	x	3/16	13.9
2-1/4	x	3/16	15.4
2-1/2	x	3/16	17.1

CUSTOM FABRICATED PIECES AVAILABLE - GRATING CLIPS STOCKED




PERFORATED METAL

Please Ask Your Salesman For More Information.



DIAMOND-GRIP SAFETY GRATING

GALVANIZED

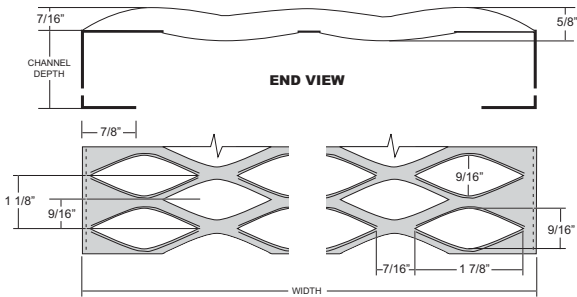

	Width	Channel	Gauge	Wgt. Lb/Ft	Length
3 diamond	7"	2"	12	4.4	12'
4 diamond	9-1/2"	2"	12	5.1	12'
5 diamond	11-3/4"	2"	12	6.1	12'

OTHER SIZES AVAILABLE